


MKP 26 METALLISED POLYPROPYLENE FILM CAPACITOR

AXIAL WRAP AND END FILL FORMAT

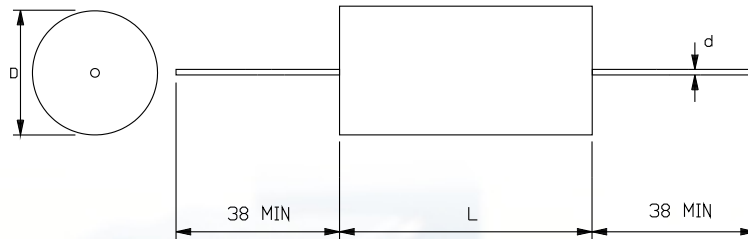

SEE TABLE OVERLEAF FOR CAPACITANCE VALUES AND DIMENSIONS .

GENERAL DETAILS

A RANGE OF LOW COST AXIALLY LEADED CAPACITORS FOR GENERAL PURPOSE AC APPLICATIONS. MKP26 CAPACITORS ARE SUPPLIED IN WRAP AND END FILL CONSTRUCTION TO GIVE OPTIMUM VOLUMETRIC EFFICIENCY.

TECHNICAL DETAILS

DIELECTRIC
ELECTRODES
ENCAPSULATION

POLYPROPYLENE.
VACUUM DEPOSITED ALUMINIUM.
POLYESTER TAPE WRAP & RESIN END SEAL.

LEADS

AXIAL TINNED COPPER, SEE TABLE OVERLEAF FOR DIAMETERS.

ENVIRONMENTAL CLASSIFICATION

40 / 085 / 21.

WORKING VOLTAGES

1200 VDC / 500 VAC (50 Hz).

MAXIMUM $\delta v / \delta t$

60 V / μ S.

CAPACITANCE RANGE

100 nF - 470 nF.

TAN DELTA

< 0.001 @ 1kHz, 20°C.

INSULATION RESISTANCE

>50,000 M Ω @ 20°C.

TOLERANCES

\pm 20%, \pm 10%, \pm 5%.

MFD CAPACITORS (1991) LTD, PENLEY, CLWYD, LL13 OLY, U.K.


TEL: 01978 710551 FAX: 01978 710501 E Mail: sales@mfdcapacitors.co.uk

Website: www.mfdcapacitors.co.uk

T4.9.MKP26 PAGE 1 OF 2 ISSUE: 2 DATE: 23 OCTOBER 1995

CAPACITOR DIMENSIONS

VALUE	DIMENSIONS (MM)		
	L MAX	D MAX	d NOM
100 nF	33	10	0.6
150 nF	33	12	0.6
220 nF	33	14	0.8
330 nF	33	16.5	0.8
470 nF	33	20	0.8
680 nF	33	22	0.8
1 μ F	33	26	0.8
1.5 μ F	58	21	0.8
2.2 μ F	58	25	0.8
3.3 μ F	58	30	0.8

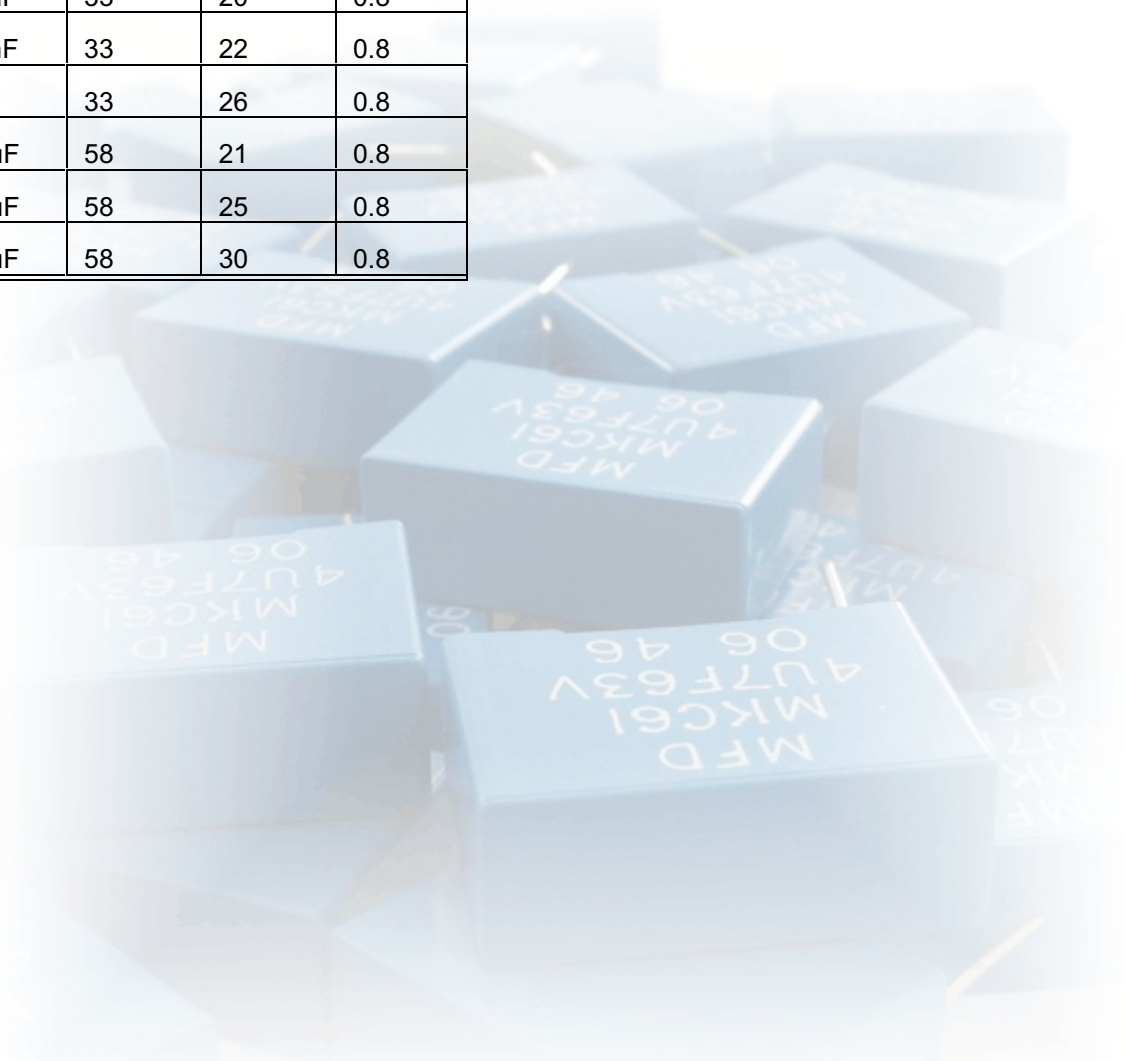

VALUES AND VOLTAGE RATINGS OTHER THAN THOSE SHOWN ARE AVAILABLE. CONTACT SALES OFFICE FOR DETAILS.

MFD CAPACITORS (1991) LTD, PENLEY, CLWYD, LL13 OLY, U.K.

TEL: 01978 710551 FAX: 01978 710501 E Mail: sales@mfdcapacitors.co.uk

Website: www.mfdcapacitors.co.uk

T4.9.MKP26 PAGE 2 OF 2 ISSUE: 2 DATE: 23 OCTOBER 1995